YIBO 以伯®

单相屏蔽电源滤波器
Single-phase shielded power filters

产品及应用 PRODUCTS APPLICATIONS

- ▲ 该系列滤波器用于屏蔽房内的电话通信、网络数据通信空调控制、消防报警、对讲门铃等信号的传输和报警控制系统
- ▲ 适用于高性能电磁屏蔽室配套
- ▲ 体积小，性价比高
- ▲ 金属壳体采用镀镍钢板,机械强度高，耐腐蚀性强

- ▲ This series of filters are used for the transmission of signals and alarm control systems for telephone communication, network data communication air-conditioning control, fire alarms, intercom doorbells, etc. in shielded rooms.
- ▲ Suitable for high performance electromagnetic shielding room supporting.
- ▲ Small size and cost-effective.
- ▲ The metal shell is made of nickel-plated steel plate, with high mechanical strength and strong corrosion resistance.

技术参数 SPECIFICATION

最高工作电压 Maximum operating voltage	工作频率 Operating frequency Hz	耐压试验 Voltage withstand test		工作温度 Operating temperatureHz	单相配线 Single phase wiring
250VAC500VDC	50HZ/60HZ	1000VDC/30S（线 - 线）Line - Line	1000VDC/30S（线 - 地）Line-Ground	25/070/21	单相交流双线 (L,N) 单相交流带地线 (L,N,G) 单相交流双火线 (L1,L2) Single-phase AC double wire (L,N) Single-phase AC with ground (L,N,G) Single-phase AC double fire wire (L1,L2)

产品型号 FILTER	额定电压 Rated Voltage	额定电流 Rated Curren	泄漏电流 Leakage current	屏蔽效能 Shielding Effectiveness	外形尺寸 Dim.diagram
YB-2x16C	250VAC 500VDC	2x16A	⩽ 100mA	⩾ 100dB 14kHz~40GHZ	C01
YB-2x32C		2x32A	⩽ 100mA		C01
YB-2x63C		2x63A	⩽ 100mA		C02
YB-2x100C		2x100A	⩽ 100mA		C03
YB-2x150C		2x150A	⩽ 200mA		C04
YB-2x200C		2x200A	⩽ 200mA		C04
YB-2x250C		2x250A	⩽ 300mA		详见规格书 See specifications for details
YB-2x300C		2x300A	⩽ 300mA		详见规格书 See specifications for details
YB-2x400C		2x400A	⩽ 500mA		详见规格书 See specifications for details

外形 Shape	图号 Figure number	L	W	H	J	M	S	T	P	D	K
C01	F01	450	130	80	--	M24x1.5	--	385	80	8.2	35
C02	F01	500	145	80	--	M33x2.0	--	435	80	8.2	35
C03	F01	600	185	90	--	M33x2.0	--	535	100	8.2	35
C04	F02	800	200	140	830	M33x2.0	90	760	100	9	55
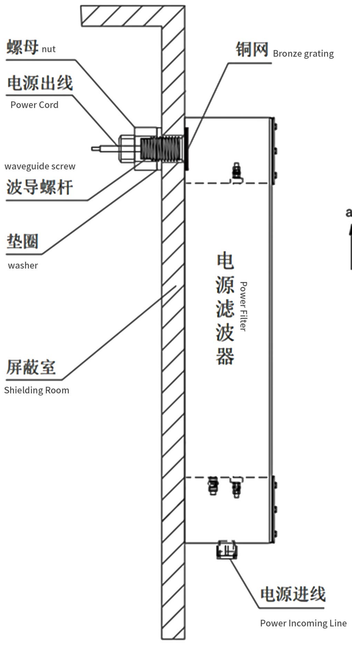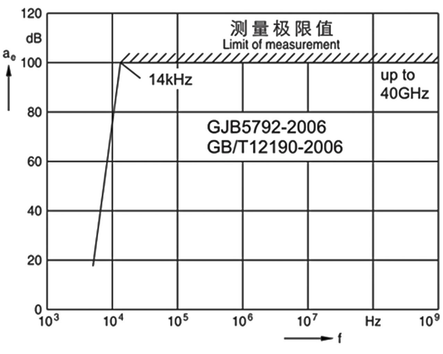
安装示意图 INSTALLATION SCHEMATIC