YIBO 以伯®

三相屏蔽电源滤波器
Three-phase shielded power filters

产品及应用 PRODUCTS APPLICATIONS

- 该系列滤波器用于屏蔽房内的电话通信、网络数据通信空调控制、消防报警、对讲门铃等信号的传输和报警控制系统
- 适用于高性能电磁屏蔽室配套
- 体积小，性价比高
- 金属壳体采用镀镍钢板,机械强度高，耐腐蚀性强

- This series of filters are used for the transmission of signals and alarm control systems for telephone communication, network data communication air-conditioning control, fire alarms, intercom doorbells, etc. in shielded rooms.
- Suitable for high performance electromagnetic shielding room supporting.
- Small size and cost-effective.
- The metal shell is made of nickel-plated steel plate, with high mechanical strength and strong corrosion resistance.



技术参数 SPECIFICATION

最高工作电压 Maximum operating voltage	工作频率 Operating frequency Hz	耐压试验 Voltage withstand test		工作温度 Operating temperatureHz	三相配线 Three-phase wiring
440/250VAC	50HZ/60HZ	1000VDC/30S (线 - 线) Line - Line	1000VDC/30S (线 - 地) Line-Ground	25/070/21	三相三线 (A,B,C) 三相四线 (A,B,C,N) 三相五线 (A,B,C,N,G) Three-phase three-wire (A,B,C) Three-phase four-wire (A,B,C,N) Three-phase five-wire (A,B,C,N,G)

产品型号 FILTER	额定电压 Rated Voltage	额定电流 Rated Curren	泄漏电流 Leakage current	屏蔽效能 Shielding Effectiveness	外形尺寸 Dim.diagram
YB-4x16C	440/250VAC	4x16A	≤ 100mA	≥ 100dB 14kHz~40GHZ	C05
YB-4x32C		4x32A	≤ 100mA		C05
YB-4x63C		4x63A	≤ 100mA		C06
YB-4x100C		4x100A	≤ 100mA		C07
YB-4x150C		4x150A	≤ 200mA		C08
YB-4x200C		4x200A	≤ 200mA		C08
YB-4x250C		4x250A	≤ 300mA		详见规格书 See specifications for details
YB-4x300C		4x300A	≤ 300mA		详见规格书 See specifications for details
YB-4x400C		4x400A	≤ 500mA		详见规格书 See specifications for details

外形 Shape	图号 Figure number	L	W	H	J	M	S	T	P	D	K
C05	F03	550	220	80	--	M33x2.0	--	470	120	8.2	35
C06	F03	650	220	90	--	M33x2.0	--	570	120	8.2	35
C07	F03	700	240	110	--	M42x2.0	--	615	140	8.2	40
C08	F04	840	300	130	870	M48x2.0	145	805	200	9	50
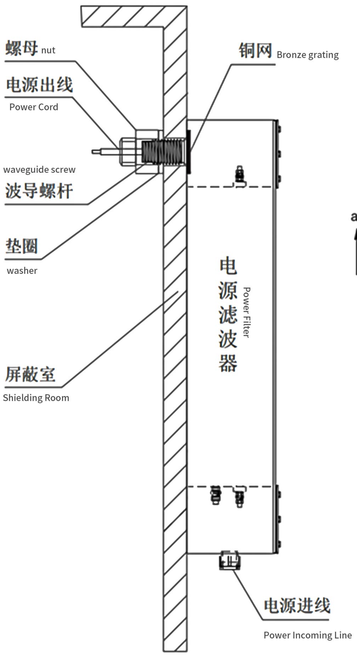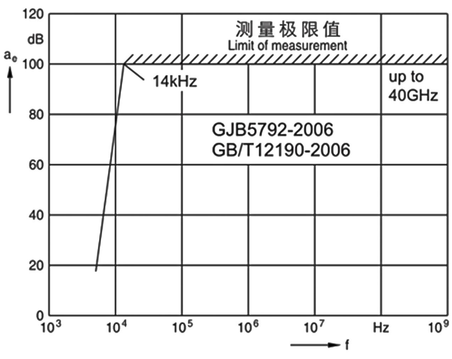
安装示意图 INSTALLATION SCHEMATIC