


产品及应用PRODUCTS APPLICATIONS

- ▲ 单相干式变压器广泛适用于交流50或60Hz，电压至660V户内式的电器电源设备之用。产品的输入、输出电压，调节抽头位置，绕组容量分配，次级绕组配备，是否要求带外壳等，均可根据用户的要求进行精心的设计与制造。
- ▲ The single-phase dry-type transformer is widely used for indoor electrical equipment with AC 50 or 60Hz, up to 66V. The product's input and output voltage, tap position, winding capacity allocation, secondary winding configuration, and whether to include a shell, can all be customized to the user's requirements.

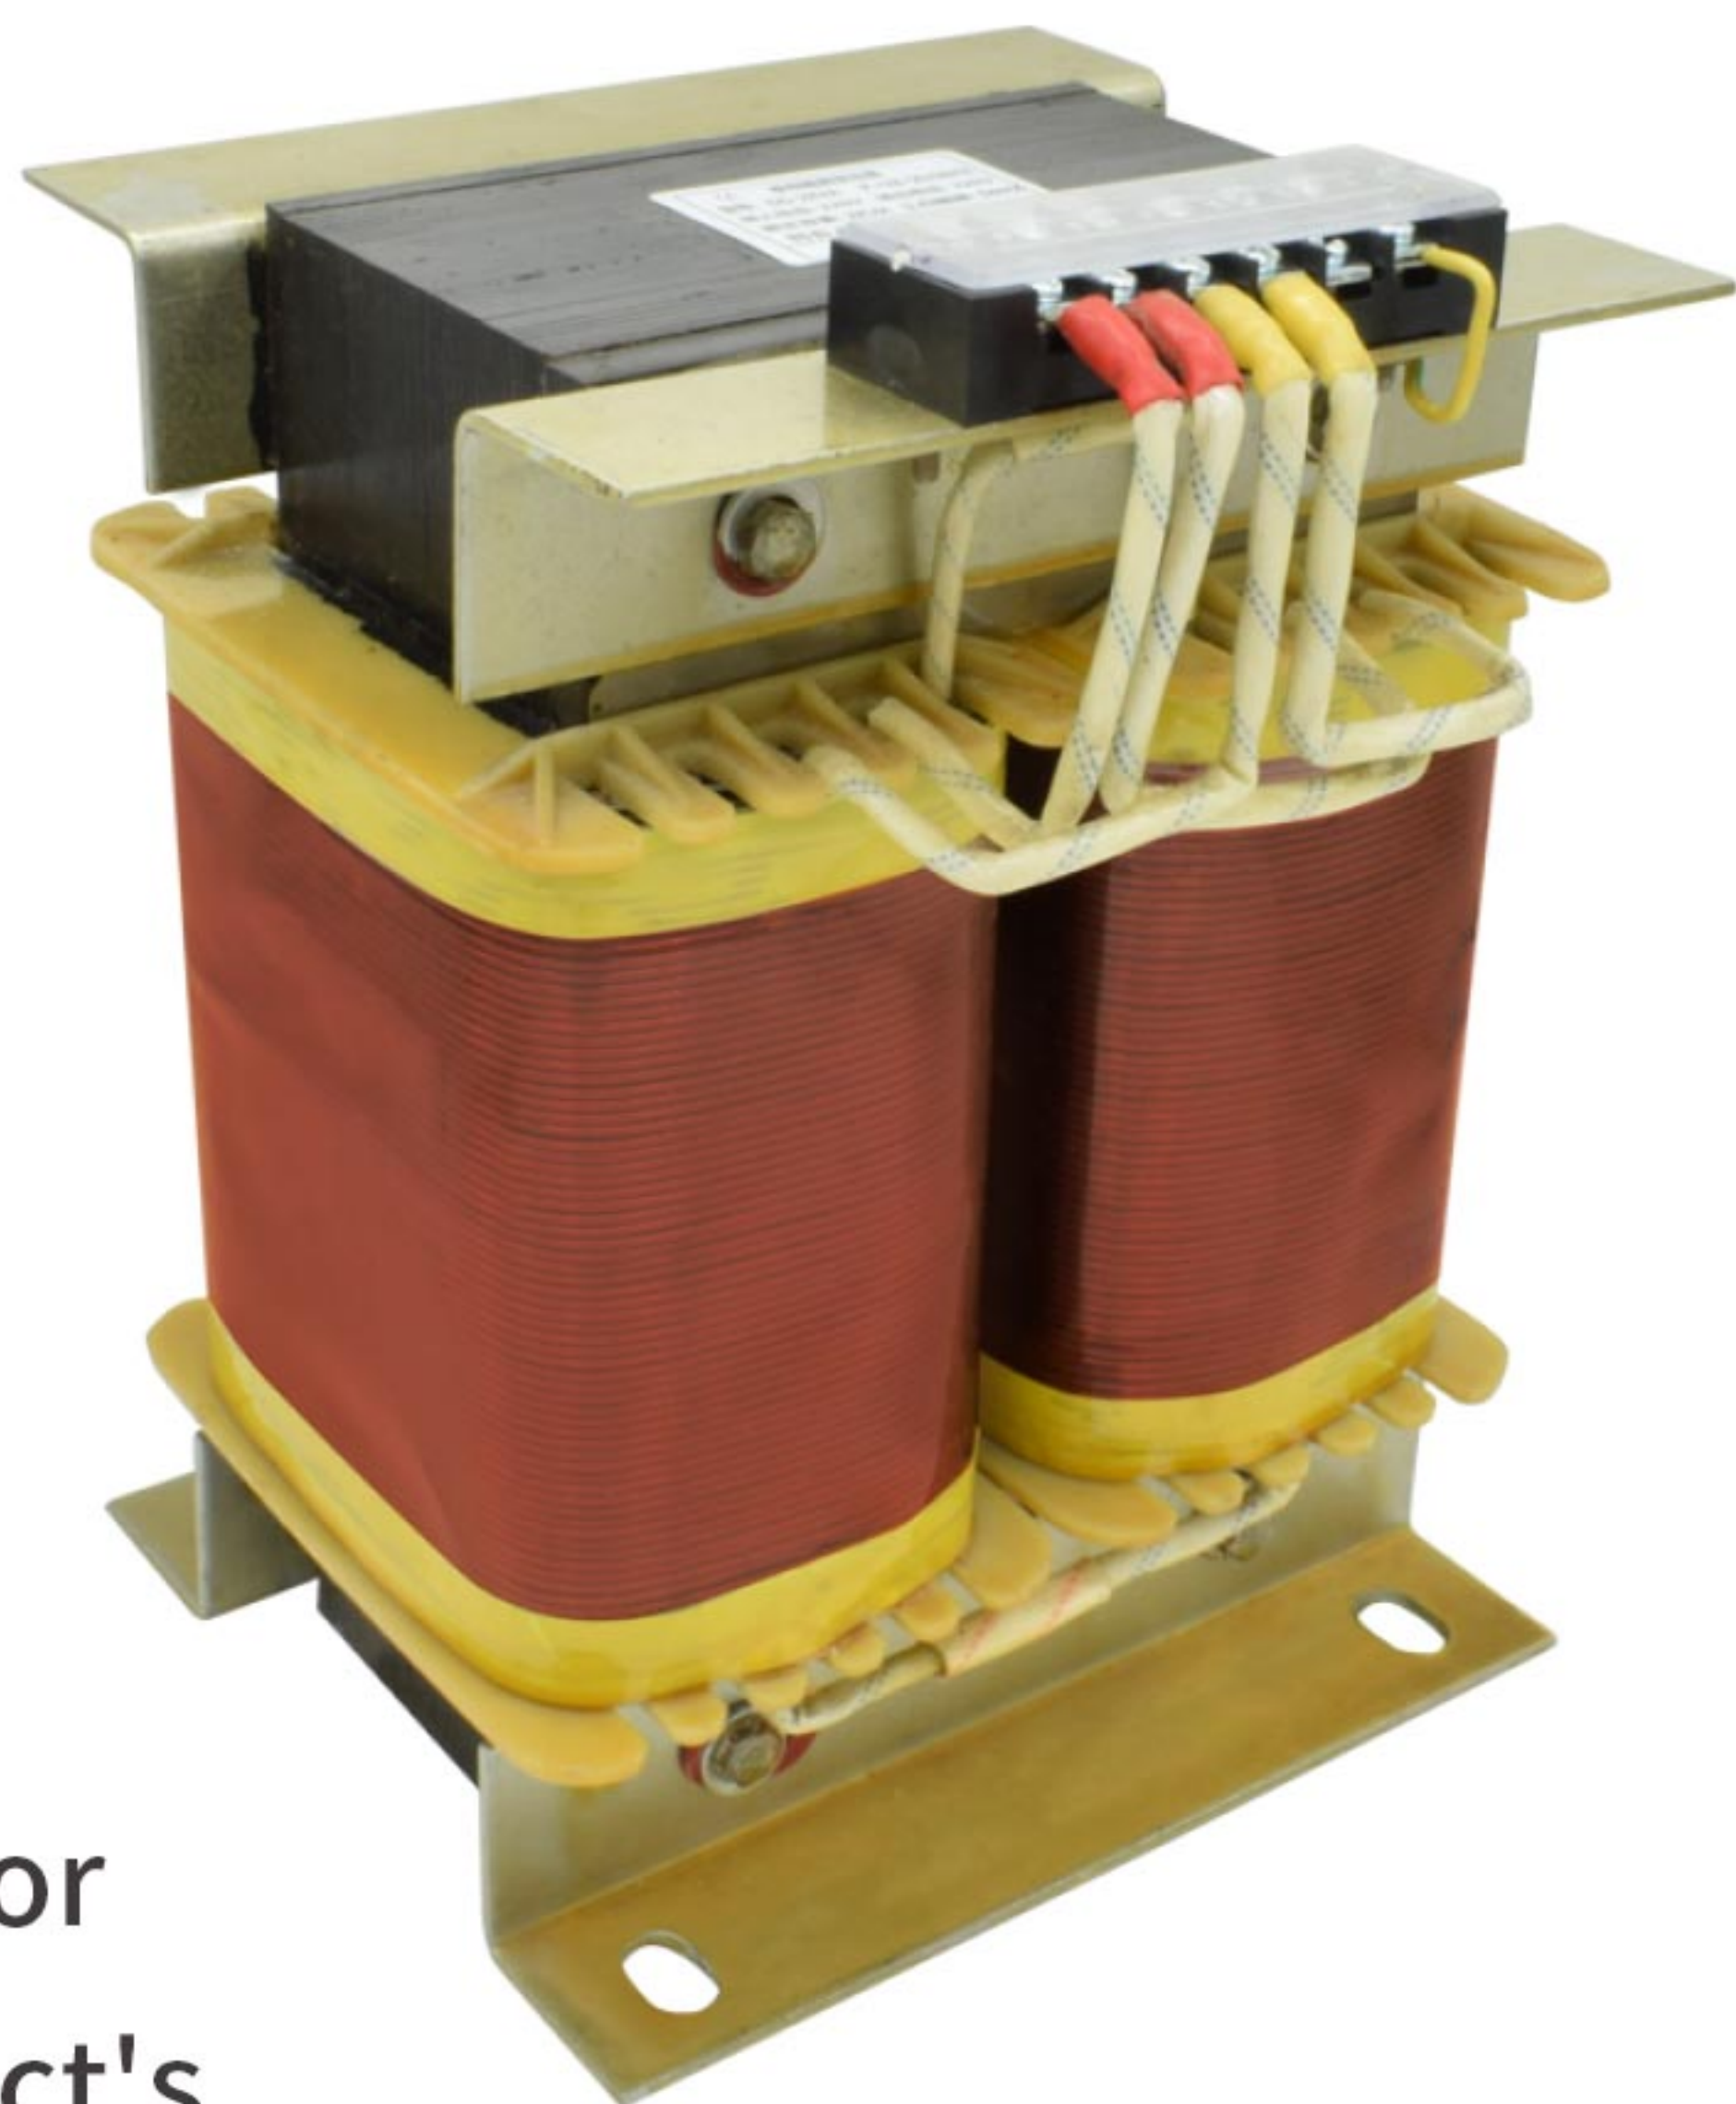

技术参数SPECIFICATION

- 1.额定容量：5KVA~320KVA

3.温升限值：铁芯不超过85K，线圈温升不超过95K

4.输入额定电压：三相380V或单相220V

6.工频耐压：3KV/min
- 2.联结组别：li0

5.电压等级：1KV
- 1.Rated capacity: 5KVA~320KVA

3.Temperature rise limit: core not exceeding 85K, coil temperature rise not exceeding 95K

4.Input rated voltage: Three-phase 380V or Single-phase 220V

6.Power frequency withstand voltage: 3KV/min
- 2.Connecting group: li0

5.Voltage level: 1KV

型号 Models	容量 KVA Capacity	重量 kg Weight	外形尺寸 External dimensions			安装尺寸 Installation dimensions		安装孔 Mounting holes
			L	w	H	A	B	
DG-5	5	50	240	210	330	150	140	11×18
DG-8	8	65	240	225	330	150	155	11×18
DG-10	16	85	280	230	380	175	160	11×18
DG-15	30	110	400	250	480	250	155	14
DG-20	45	140	410	250	540	250	155	14
DG-25	75	175	440	260	620	250	160	14
DG-30	100	190	440	260	630	250	160	14
DG-40	120	235	470	270	670	300	165	14
DG-50	150	280	510	360	700	300	180	14
DG-63	200	360	590	450	700	350	350	14
DG-80	300	440	620	450	700	350	400	14
DG-100	420	570	770	550	810	450	500	14
DG-125	500	680	800	550	850	500	500	14
DG-160	630	900	800	550	950	500	500	14
DG-200	800	1030	970	650	985	500	600	14
DG-250	1200	1130	990	780	1000	550	660	14
DG-315	1600	1310	1020	780	1020	550	660	14