YIBO 以伯®

YB360T/YB360TG系列series
端子导轨式三相三线电源滤波器
Terminal rail-mounted three-phase three-wire power filter

产品及应用 PRODUCTS APPLICATIONS

- ▲ 三相三线电源滤波器，滤波效果优良
- ▲ 优异的高低频滤波特性，泄露电流低
- ▲ 端子导轨式滤波器
- ▲ 广泛应用于三相电子设备，如打印设备、包装设备纺织设备、工业空调、UPS、X-Ray、CT

- ▲ Three-phase three-wire power filter, excellent filtering effect
- ▲ Excellent high and low frequency filtering characteristics, low leakage current
- ▲ Terminal rail filter
- ▲ It is widely used in three-phase electronic devices, such as printing equipment, packaging equipment, textile equipment, industrial air conditioners, UPS, X, CT, etc

技术参数 SPECIFICATION

最高工作电压 Maximum operating voltage (VAC)	工作频率 Operating frequency Hz	试验电压 Hipot test voltage P-P(VDC)	P-E(VDC)	工作温度 Operating temperatureHz	绝缘电阻 Minimum insulation resistance
380/440	50/60	2150	2700	-25~+85°C	>200M@500VDC

产品型号 FILTER	端接方式 Connections		额定电流 Current rating @40°C	外型尺寸 Housing	泄漏电流 Leakage current	电路参数 Components			
	端子 Terminal	导轨 Guide rail				L（mH）	Cx(uF)	Cy(nF)	R(MΩ)
YB360T-5	√	---	5A	NT-5	<1.5mA	3	0.47	10	1M
YB360T-10	√	---	10A	NT-5	<1.5mA	1	0.47	10	1M
YB360T-16	√	---	16A	NT-5	<1.5mA	0.8	0.47	10	1M
YB360T-20	√	---	20A	NT-5	<1.5mA	0.8	0.47	10	1M
YB360T-30	√	---	30A	NT-5	<1.5mA	0.5	0.47	10	1M
YB360T-40	√	---	40A	NT-6	<1.5mA	0.5	0.47	10	1M
YB360T-50	√	---	50A	NT-6	<1.5mA	0.3	0.47	10	1M
YB360T-60	√	---	60A	NT-6	<1.5mA	0.3	0.47	10	1M
YB360TG-5	√	√	5A	NTG-5	<1.5mA	3	0.47	10	1M
YB360TG-10	√	√	10A	NTG-5	<1.5mA	1	0.47	10	1M
YB360TG-16	√	√	16A	NTG-5	<1.5mA	0.8	0.47	10	1M
YB360TG-20	√	√	20A	NTG-5	<1.5mA	0.8	0.47	10	1M
YB360TG-30	√	√	30A	NTG-5	<1.5mA	0.5	0.47	10	1M
YB360TG-40	√	√	40A	NTG-6	<1.5mA	0.5	0.47	10	1M
YB360TG-50	√	√	50A	NTG-6	<1.5mA	0.3	0.47	10	1M
YB360TG-60	√	√	60A	NTG-6	<1.5mA	0.3	0.47	10	1M

电路原理图 CIRCUIT DIAGRAM

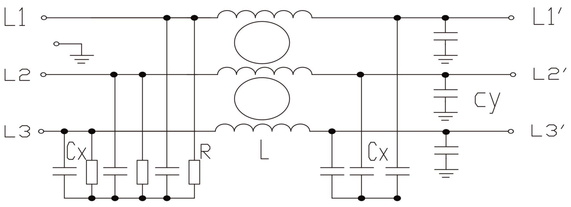

外型尺寸 HOUSING AND DIMENSIONS:（MM）



NT-5



NT-6



NTG-5



NTG-6

插入损耗 INSERTION LOSS IN DB（IN 50/50Ω SYSTEM）



6A



10A



20A



30A



50A



75A：100A